

LCD Monitor Hood with Lens

52121

Instruction Manual

Thank you for your purchase of SEA&SEA product. For proper operation of the product and safe handling, please read the following instructions carefully before use. This manual should be retained for future reference.

Note:

The appearance of color evenness or weld lines on the external body of the product is normal and will not affect its performance.

Safety Precautions

Failure to heed the precautions listed below could result in serious consequences. To prevent injury or damage to yourself and/or others, please observe the precautions as they contain highly important information related to personal and product safety.

WARNING Situations that could result in severe injury or death.

CAUTION Situations that could result in property damage or personal injury.

WARNING

- Do not look at the sun through the lens or the viewfinder to prevent permanent visual impairment.
- Do not leave the product under the sun without covering the product, to prevent fire due to concentrated sun rays.


CAUTION

- Unauthorized disassembling and/or modification could result in malfunction or flooding, and void product warranty. Take the product to a SEA&SEA authorized service center for repair or inspection.
- Always make sure that the camera, strobe, light and accessories are securely mounted to prevent them from falling off, becoming lost, causing personal injury or equipment malfunction.
- Avoid strong shocks/impacts or excess stress to prevent malfunction, damage or breakdown. Make sure that the product has been securely mounted to other products in order to prevent injury, fall or missing.
- Do not carry the camera housing by holding the accessories such as arm, cable, strobe, etc. Heavy components may fall and cause damage or injury.
- Do not leave the product in places with hot temperatures such as inside of a car or in a car trunk in summer.
- Do not store the product in wet or high humidity place, to avoid mold, rust, corrosion or malfunction.
- Always dry the product using a soft cloth to prevent stain or salt residue from marring the glass surface.
- SEA&SEA SUNPAK Co., Ltd. will not be responsible for the replacement or compensation for cameras, lenses or those accessories damaged due to your invalid operation.
- SEA&SEA SUNPAK Co., Ltd. assumes no liability for compensation of loss of captured images or expenses caused by loss of images, even if you are unable to shoot due to a product defect or malfunction.
- SEA&SEA SUNPAK Co., Ltd. assumes no liability for errors or discrepancies in this manual.

Maintenance and Storage

- Never use chemicals, cosmetics, any petroleum solvents such as paint thinner, or neutral detergent on the product. They may deform and damage the product.
- After each use in salt water, soak it sufficiently in fresh water.
- Insufficient soaking causes damage by salt to the product. Salty residue may be left on the product where it will crystallize as it evaporates. Crystallized salt is hard to dissolve and difficult to be removed once formed.
- After rinsing, dry the product well with a soft dry cloth, then let the product dry in the shade, out of direct sunlight.
- Do not dry the product by heating (using a hair dryer, for example). Heating can deform and damage the product.
- If you will not use the product for an extended period of time, store it away from high temperatures, high humidity, direct sunlight, or extreme cold.
- Do not store the product with naphthalene or camphor mothballs, or in locations such as a laboratory where chemicals are used. This environment can cause mold, rust, corrosion or malfunction.

Identification of Parts

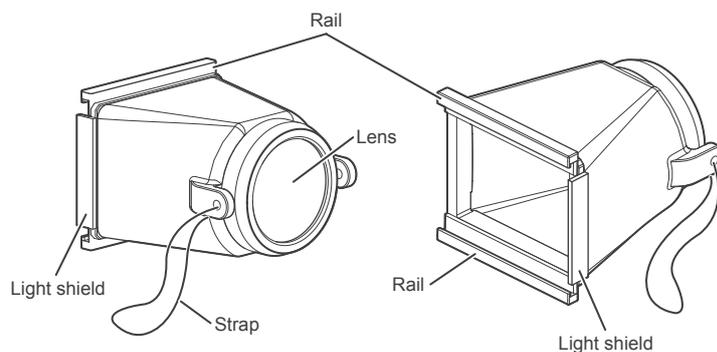

Installation

This product can be attached to SEA&SEA compact digital camera housings.

1 Remove the LCD monitor hood of housing (Fig.1)




Fig.1

2 Attach the strap to the LCD monitor hood string eyelet of housing (Fig.2)




Fig.2

3 Align the edge of rail (A) with the edge of the housing LCD monitor hood holder (B) and slide together following the direction of the arrow (Fig.3)




Fig.3

- Make sure the attached hood does not interfere with the housing control buttons.
- Be careful the strap does not get caught between the rails when sliding the hood onto the housing.

4 Look at the LCD screen through the new hood to ensure it is attached correctly (Fig.4)




Fig.4

CAUTION

- Make sure the hood is secure and cannot fall off or become loose underwater.

Specifications

Compatible models *1	DX-GE5 (Current as of Jun.2011)
Operating temperature	0-40°C / 32-104°F
Compatible LCD monitor size	Approx. 62(W) x 47(D) mm / 2.44 x 1.85 inches
Weight	Approx. 123g / 4.33oz
Dimensions	Approx. 84(W) x 85(H) x 67(D) mm / 3.3 x 3.34 x 2.63 inches
Accessories	Strap (Attached accessory to the product), Instruction manual

*1 Please refer to our website (<http://www.seaandsea.jp>) for the latest information.
*Specifications and appearance are subject to change without notice.